

ENDURAPLAS
ADVANTAGE
FIRE RANGER™



- SMFB060FG120GH
- SMFB100FG120GH
- SMF200FG120GH
- SMF250FG120GH
- SMF300FG120GH
- SMF400FG120GH

DESIGNED BETTER. BUILT STRONGER. LASTS LONGER.

SOLID-WALL™ TANK CONSTRUCTION


With thick side-walls, this workhorse is high-impact-resistant and virtually indestructible.

POLY-FLEX™ HOSE REEL

Unlike steel, this crack-proof, easy-wind poly hose reel will flex.

POWER-HEAD™ WATER PUMP

High-pressure, high-volume and self-priming, this Honda® pump dumps a serious amount of water.

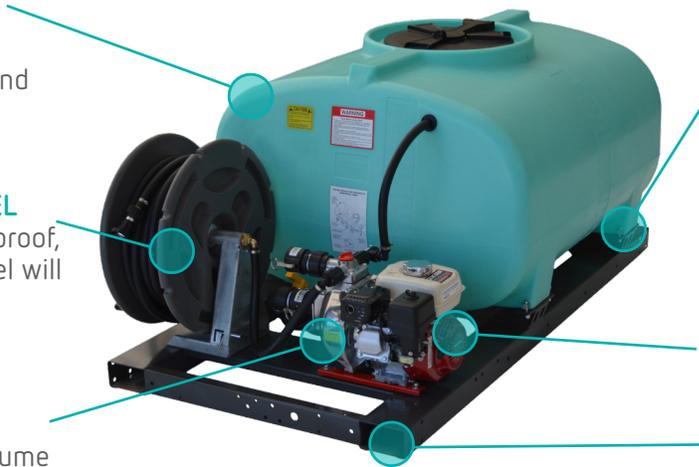

ANCHOR-POINT™ TIE-DOWN SLOTS

Heavy-duty, never-fail tie-down slots are built-in on both sides. This makes tying down this unit quick and hassle-free.

EASY-START™ HONDA® ENGINE

Within the first few pulls, this trusty, reliable engine is guaranteed to start. Even after a long Winter.

TIME-SAVER™ FORK-POINTS

The built in fork slots makes the entire unit a breeze to lift and load.

100
PSI

120
GPM

35'
VERTICAL
SPRAY

40'
HORIZONTAL
SPRAY

\$

PRODUCT CODE	TANK SIZE (GAL)	DIMENSIONS (L X W X H)	MOTOR	PUMP	FLOW RATE (GPM)	PSI	INCLUDES FOAM TANK	HOSE LENGTH	SPRAY DISTANCE VERTICAL	SPRAY DISTANCE HORIZONTAL	DRY WEIGHT (LBS)
SMFB060FG120GH	60	48" x 38" x 23"	GX160 Honda/5.5 HP	Centrifugal	120	100	No	100'	35'	40'	235
SMFB100FG120GH	100	48" x 45" x 27"	GX160 Honda/5.5 HP	Centrifugal	120	100	No	100'	35'	40'	250
SMF200FG120GH	200	80" x 47" x 33"	GX160 Honda/5.5 HP	Centrifugal	120	100	No	100'	35'	40'	358
SMF250FG120GH	250	80" x 47" x 38"	GX160 Honda/5.5 HP	Centrifugal	120	100	No	100'	35'	40'	458
SMF300FG120GH	300	102" x 46" x 36"	GX160 Honda/5.5 HP	Centrifugal	120	100	No	100'	35'	40'	521
SMF400FG120GH	400	102" x 46" x 45"	GX160 Honda/5.5 HP	Centrifugal	120	100	No	100'	35'	40'	541

*Double your 5 yr tank warranty when you register this product. *All Enduraplas poly tanks are manufactured in the United States of America.



ENGINEERED FOR ENDURANCE®

www.enduraplas.com
 info@enduraplas.com
 1 (877) 877-4370